



Hoya Star International Limited

Dragonfly Buckle Tile Leveling System

- * No embedded base
- * No consumables
- * Reusable
- * Easy operation


Step Description



Turn 90 degrees after the insertion and can be hooked at the bottom of the tile





Hold the handle and keep it unmoved to tighten the nut to reach a fixed leveling

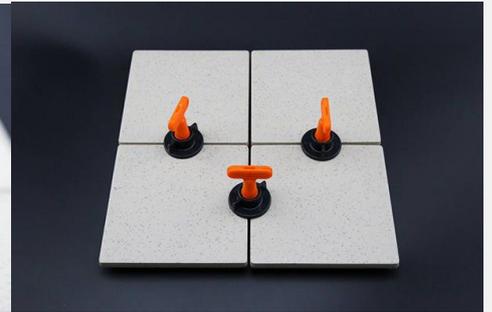

Tile leveling holder effectively improve construction quality and efficiency


The fixed slice of external & internal angle

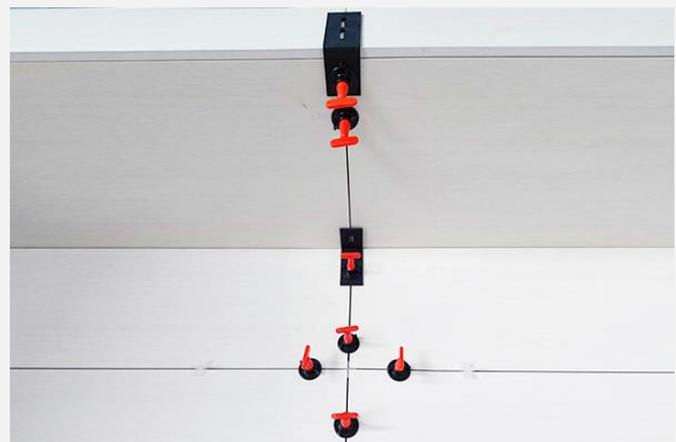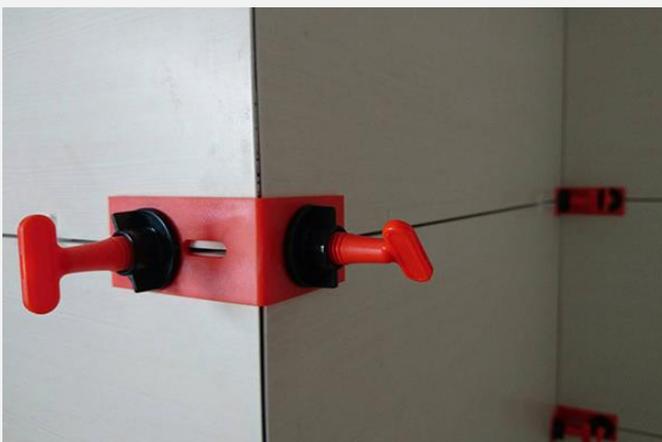



Hoya Star International Limited

Special wrench

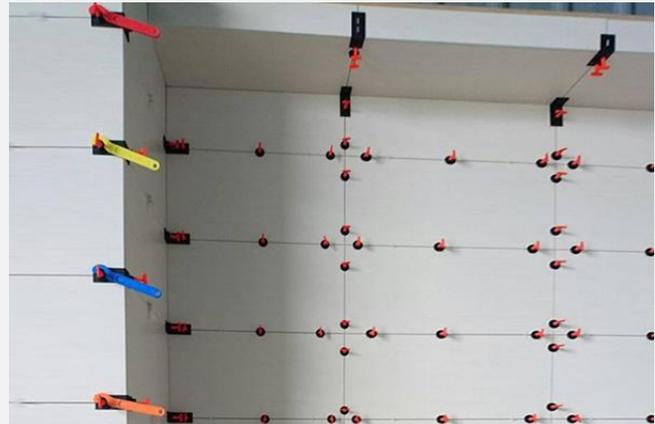

Sheet leveling system (Dragonfly buckle) #HY-Q311




Applicable for tile gap 1.5 ~ 3mm after fit the tool

Tile leveling system (Dragonfly buckle) #HY-Q312




Applicable for tile gap 1.5 ~ 5mm after fit the tool

Polished quartz brick leveling system (Spade buckle) #HY-Q620

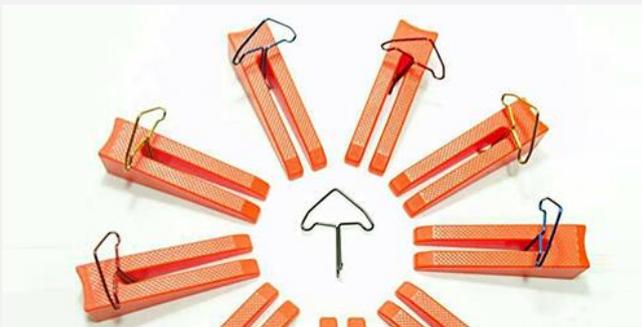

Applicable for tile gap 2 ~ 8mm after fit the tool

Marble leveling system (Spade buckle) HY-#Q621

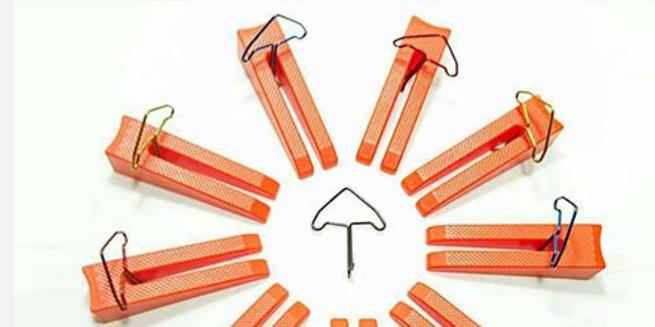

Applicable for tile gap 2 ~ 8mm after fit the tool

Spec.

Item No.	HY-Q311	HY-Q312	HY-Q620	HY-Q621
Applicable thickness	2~7mm	2~7mm	7~15mm	17~25mm



Hoya Star International Limited

Tile leveling system (Dragonfly buckle) – photo for brick processing



It is unable for regular tile leveling system when modify the tile & stone, you best choice on our tile leveling system which any embedded base is needed & good performance.







Hoya Star International Limited

Sheet leveling system (Dragonfly buckle) #HY-Q311

Use for ceramic sheets with 3mm (t) for best flatness.

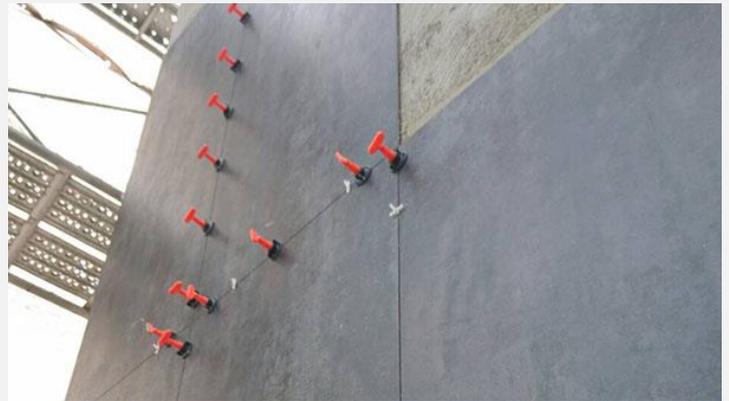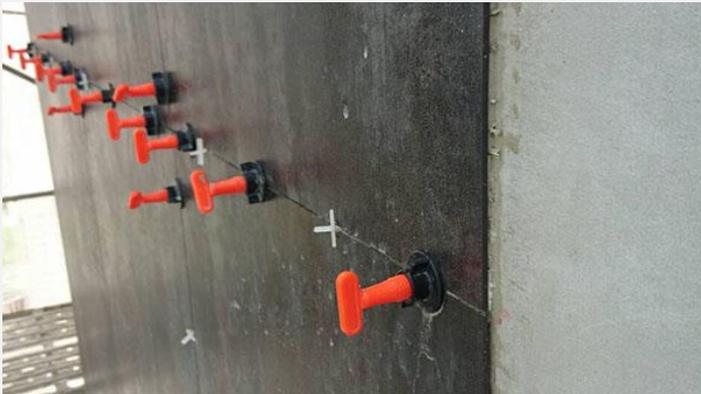

Q: How is the applicable grout joint width for tile leveling system #HY-Q312?

A: 1.5mm ~ 5mm as the applicable grout joint width for #HY-Q312.

Q: How is the applicable tile thickness for tile leveling system #HY-Q312?

A: 7mm ~ 23mm as the suitable thickness for #HY-Q312.

Q: How is the life time of reuse for tile leveling system #HY-Q312?

A: Material with the stainless steel, available for 50 times if by correct operation.

Q: How many pieces of tile leveling system are required per square meter?

A: Not required on embedded base in advance for our tile leveling system, q'ty is depending on the site area.

Q: When can we remove the tile leveling system?

A: Normally by 12 hours but depends on the hardening time from tile adhesive, however suggest to remove within 24 hours.

Q: Is it applicable for tile or wall brick?

A: Our tile leveling system is applicable for sheets, polished quartz bricks, wall bricks, tiles, marbles and plats. It can reach a best performance when wall bricks works with spacers.