




Hoya Star International Limited

HY-HL1115 Ultra Slim LED COB Work Light

ULTRA LED COB SLIM LIGHT


ADJUSTABLE LUMEN SWITCH

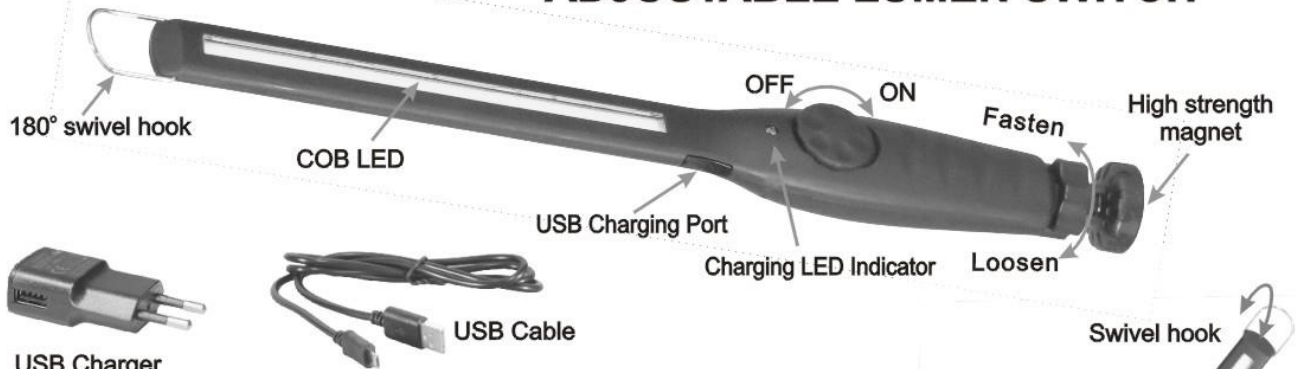

USB Charger
 Input: 100~240V AC
 Output: 5V DC 1A



USB Cable

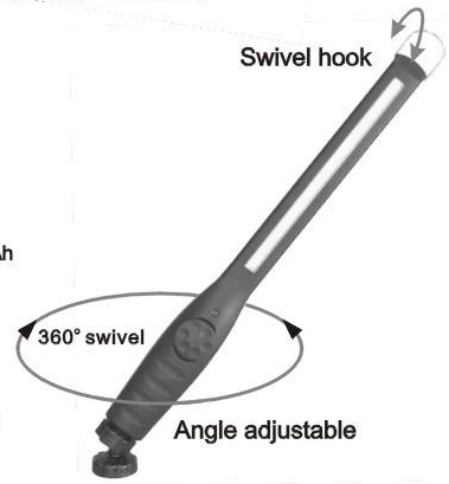

Features :

1. Micro adjustment lumen switch
2. Foldable base with powerful magnet
3. Swivel hanging hook
4. Build in 2200 mAh LI-Ion battery
5. For full light -approx 2.5 hours working hours, for semi light - approx 12 working hours
6. 4 hours charging time:
 in charging - red indicator light on,
 charged completed - blue indicator light on,
 low battery - yellow indicator light on,
7. Comes with 5V 1A USB charger & USB cable


Specifications:

- A. LED Max power : 15W LED COB light
- B. LI-ion Rechargeable battery : 3.7V 2200mAh
- C. Charger input : AC100~240V 50/60Hz
- D. Power output : 5.0V 1000mAh
- E. Charger time : 3.5~4.0hours
- F. Active time : 2.5hours
- G. Storage temperature : -20°C to 70°C
- H. Operation temperature : -5°C to 50°C
- I. Product Size : 375(L) X 40(W) X 30(H) mm



HY-HL9008 Ultra Slim Flexible LED COB Light

FLEXIBLE LED COB SLIM LIGHT

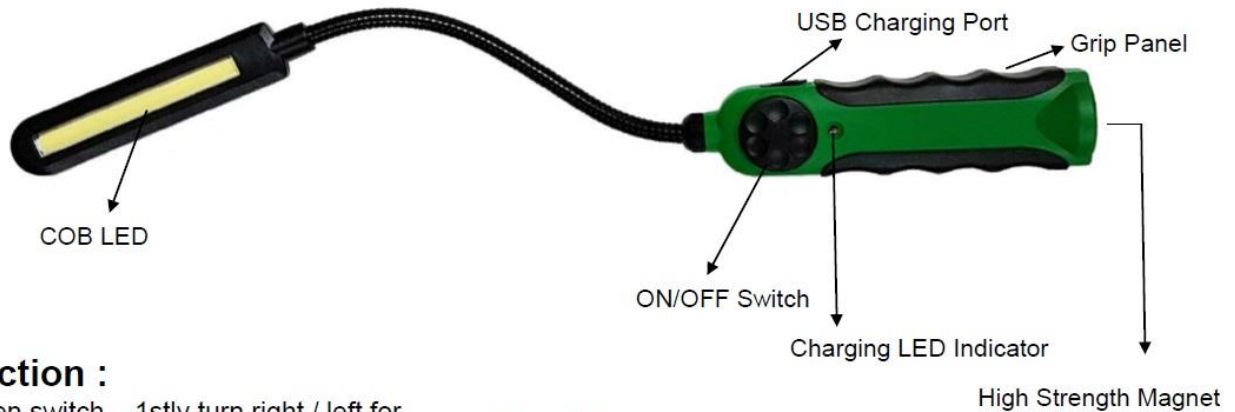

Instruction :

1. Lumen switch – 1stly turn right / left for on / off, then turn the switch slightly right or left for necessary light
2. Built-in 2300 mAh Li-ion battery - for recharging power supply
3. Charging battery – use USB charger and USB cord connected to the USB charging port and plug into socket for re-charging
4. LED charging indicator :
Red light on – in charging
Blue light on – completely charged

Caution :

- Do not turn on the lumen switch when charging battery
- Always unplug after battery completely charged
- Do not disassemble the built-in battery
- Keep the LED light away from fire / water or heat / damp place
- Do not immerse the LED light in water / solvent
- Do not shine the LED light directly on anybody's eyes

Weight: 270 g

Material:

- Body: Plastic Nylon + Fiber Glass
- Light part: Plastic Nylon + Fiber Glass
- Flexible Shaft: Metall Fe
- Lens: Acryl PMMA

Dimensions

- Total length: 445 mm

Lighting Part:

- Length: 125 mm
- Width: 25 mm
- Thickness: 13 mm

Flexible Shank:

- Length 170 mm
- Diameiter: 8 mm

Handle part:

- Length: 150 mm
- Width: 40 mm - Thickness: 34 mm